

Leica DISTO™ E7500i

The original laser distance meter



Precise targeting and reliable outdoor measurement!

The new Leica DISTO™ E7500i stands for easy and effortless outdoor distance measurement. The unique combination of digital Pointfinder and 360° tilt sensor allows measurements which are not possible with conventional distance meters. In addition, with Bluetooth® Smart and attractive free apps, you are prepared for the future.

Featured with:

- Color Pointfinder display with 4x zoom
- IP65 water jet protection and dust-tight
- 360° tilt sensor
- Smart Horizontal Mode™
- Height tracking
- Bluetooth® Smart
- Free App – Leica DISTO™ sketch
- Onboard help key



- when it has to be **right**

Leica
Geosystems



Simple and precise targeting

With the Pointfinder and 4x zoom, the Leica DISTO™ E7500i takes measurements with perfect accuracy and in unfavorable light conditions. This is a decisive advantage when working outside in sunny weather. Even if the red laser point is no longer visible, the target can be seen exactly on the display.



Tough and easy to clean


The housing and keypad are specially sealed against water and dust. Cleaning under running water is also no problem. Furthermore the laser distance meter can be used in all weather conditions, being dust-proof and water jet protected (IP65).



Leica DISTO™ E7500i

Art.No. 792320

- Leica DISTO™ E7500i laser distance meter
- Holster
- Hand loop
- Batteries

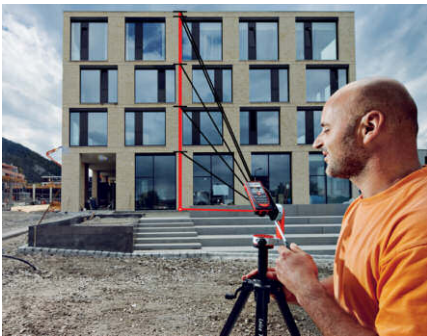

Unlimited measuring options

The Leica DISTO™ E7500i is equipped with a 360° tilt sensor. This means that it is not only possible to measure angles, but horizontal distances too! Combined with the Pointfinder, amazing indirect measurement options are provided. Hence, measurements are possible where no reflective target point is available.



Bluetooth® Smart with app

Measurement data can be transferred using the Bluetooth® Smart Technology. The free app Leica DISTO™ sketch supports the creation of ground plans or tables on **iPhone or iPad supporting BT 4.0**. Dimensions can also be entered onto photographs.



Technical Data

Accuracy, typ.	± 1 mm ~1/16th"
Range	0.05 – 200 m (2in – 650ft)
Measuring units	m, ft, in, yd
Tilt sensor	360°
Color display with Pointfinder	Yes- 4x zoom
Data interface*	Bluetooth® Smart 4.0
Free App*	Leica DISTO™ sketch
Batteries	2 x AA
Dimensions	5.6" × 2.3" × 1.15"
Memory	30 Displays
Multifunctional end-piece	automatic recognition
Personalized Favorites	Yes

Functions

Distance measurement	Inclination tracking
Min/max measurement	Area/volume
Smart Horizontal Mode	Addition/subtraction
Height tracking	Pythagoras
Height profile	Stake-out
Sloped objects	Trapezium
Long Range Mode	Calculator

*) System requirements & details at www.disto.com

All illustrations, descriptions and technical specifications are subject to change without prior notice. Printed in Switzerland. Copyright Leica Geosystems AG, Heerbrugg, Switzerland, 2012.

Leica Geosystems AG
Heerbrugg, Switzerland
www.leica-geosystems.com
Dealer Stamp



Laser class 2
in accordance with
IEC 60825-1



Register your device within 8 weeks of purchase at www.leica-geosystems.com/registration and extend your no cost period to 3 years.

- when it has to be **right**

Leica
Geosystems